





POUERING PROGRESS UITH INNOVATION

Definite Purpose Contactor

Purpose

These contactors are used for control of Motors, Power Supply on off, Heating Elements, Street Lighting, HVAC Fans and Compressors.



Definite Purpose Contactor with Shunt Coil Voltage Order Code- L5140-220V, AC 50Hz

Single Pole	with shunt		HS CODE	8536
CAT. NO.	FLA	RES.	Coil Voltage	Std.Pkg.
1P-30MS L5	12A	30A	L5 220V	100-Pcs.
CAT. NO.	FLA	RES.	Coil Voltage	Std.Pkg.
1P- 25MS U5	25A	30A	U5 240V	100-Pcs.
1P- 32MS U5	32A	40A	U5 240V	100-Pcs.
1P- 40MS U5	40A	50A	U5 240V	100-Pcs.
		-		
CAT. NO.	FLA	RES.	Coil Voltage	Std.Pkg.
1P- 25MS B5	25A	30A	B5 24V	100-Pcs.
1P- 32MS B5	32A	40A	B5 24V	100-Pcs.
1P- 40MS B5	40A	50A	B5 24V	100-Pcs.

Definite Purpose Contactor With Sunth Coil Voltage Order Code- L5140-220V, AC 50Hz

Double Pole with shunt			HS CODE	8536
CAT. NO.		DEC		Std.Pkg.
CAI. NO.	FLA	RES.	Coil Voltage	Stu.Pkg.
DP-30MS L5	12A	30A	L5 220V	100-Pcs.
CAT. NO.	FLA	RES.	Coil Voltage	Std.Pkg.
DP- 25MS U5	25A	30A	U5 240V	100-Pcs.
DP- 32MS U5	32A	40A	U5 240V	100-Pcs.
DP- 40MS U5	40A	50A	U5 240V	100-Pcs.
CAT. NO.	FLA	RES.	Coil Voltage	Std.Pkg.
DP- 25MS B5	25A	30A	B5 24V	100-Pcs.
DP- 32MS B5	32A	40A	B5 24V	100-Pcs.
DP- 40MS 85	40A	50A	B5 24V	100-Pcs.

Coil Characteristics AC Coil Voltage 50 Hz				
1 Pole , DP 2 Pole	24V, 220V, 240V, 400V			





Definite Purpose Contactor


Technical Data & Specifications

Description	Specification	
Insulation Voltage	690V	
Magnet Coil	130°C Class B (Standard)	
Contact Arc Covers	Standard on all contactors	
Standard Power Terminals	5/10 in combination head screws with sqaure washer Quad (4) quick connect terminal on all and load terminals	
Terminal Wire Range	6–10 AWG, 30 lb-in torque rating	
Mounting Position	Vertical, horizontal or tabletop	
Expected Life	200,000 operations on full load	
AC Coil	2 million operations, mechanical	

Contactor

Dimensional Drawings

Mounting Arrangement

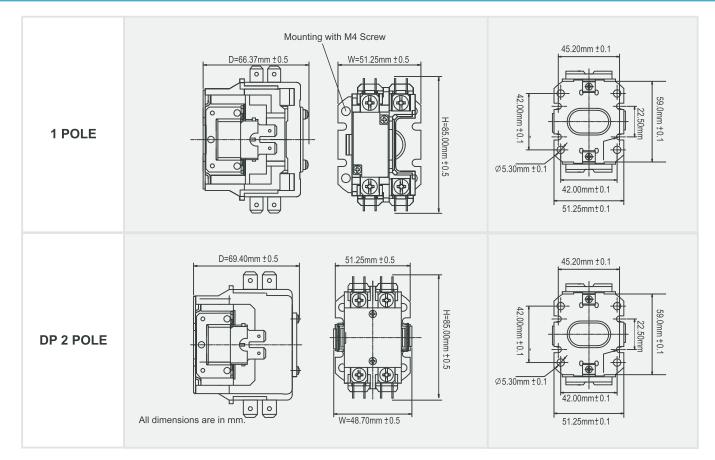



CE

Synergy Enterprises

MANUFACTURERS OF: DEFINITE PURPOSE COTACTOR, POWER CONTACTOR SUBMERSIBLE CONTROLE PANELS

CB-303B, RING ROAD, NARAINA, NEW DELHI - 110028 TEL.: +91-9811456067

www.mintpowerelectric.com

info@mintpowerelectric.com