


MINT[®]
POWER
ELECTRIC

MCH POWER CONTACTORS **POWERING PROGRESS** **WITH INNOVATION**

MCH - 2PB



MCH-2PH

NEW
MCH-2PH
DESIGN PATENT




MU-2PL

NEW
MU-2PL
DESIGN PATENT



MCH-4H

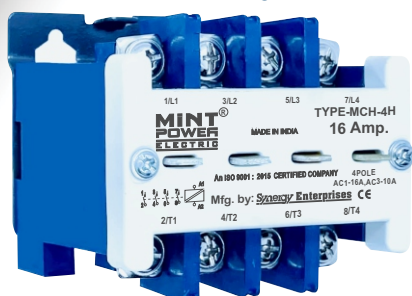

1. CAT. NO. DESIGNATION

MCH ☐ ☐ ☐ ☐


COIL ORDER CODE -
M240V, **U**W300V, **N**1350V, **N**2400V, **N**415V 50HZ/60HZ

RATED OPERATIONAL CURRENT (A)
10A, 16A, 20A, 25A, 40A AC3 415V

MCH-2PB FRAME SIZE 1


NUMBER OF CONTACT
MCH-2PB 2NO POWER POLE

PRODUCT CODE



MCH-2PB

2. MCH-2PB



- SUITABLE FOR SINGLE & THREE PHASE PUMP AND MOTOR APPLICATIONS
- SUITABLE FOR LOW VOLTAGE CONDITION
- HIGH TEMPERATURE WITHSTAND CAPABILITY
- AVAILABLE WITH WIDE BAND COIL
- EASY INSPECTION AND REPLACEMENT OF COILS AND CONTACTS
- ROBUST DESIGN SUITABLE FOR TROPICAL CONDITIONS

MCH - 2PB, 2 POLE CONTACTOR, 2NO POWER POLE CONTACT.

COIL VOLTAGE ORDER CODE - **M**240V, **U**W300V, **N**1350V, **N**2400V, **N**415V 50HZ/60HZ

Cat. No.	AC3 Rating (A)	AC1 Rating (A)	Coil Voltage Range 140-240v 50/60Hz	Std. Pkg. Nos
MCH-2PB 10A M	8A	16A	M 240V	48 Pcs.
MCH-2PB 16A M	10A	16A	M 240V	48 Pcs.
MCH-2PB 20A M	16A	25A	M 240V	48 Pcs.
MCH-2PB 25A M	25A	32A	M 240V	48 Pcs.
MCH-2PB 40A M	40A	45A	M 240V	48 Pcs.

MCH - 2PH, 2 POLE CONTACTOR, 2NO POWER POLE CONTACT.

COIL VOLTAGE ORDER CODE - **M**220V, **M**240V, **U**W300V, **N**1350V, **N**2400V, **N**415V 50HZ/60HZ

Cat. No.	AC3 Rating (A)	AC1 Rating (A)	Coil Voltage Range 140-220v 50/60Hz	Std. Pkg. Nos
MCH-2PH 10A M2	8A	16A	M2 220V	72 Pcs.
MCH-2PH 16A M2	10A	16A	M2 220V	72 Pcs.
MCH-2PH 20A M2	16A	25A	M2 220V	72 Pcs.
MCH-2PH 25A M2	25A	32A	M2 220V	48 Pcs.
MCH-2PH 40A M2	40A	45A	M2 220V	48 Pcs.

MU - 2PL, 2 POLE CONTACTOR, 2NO POWER POLE CONTACT.

COIL VOLTAGE ORDER CODE - **M**220V, **M**240V, **U**W300V, **N**1350V, **N**2400V, **N**415V 50HZ/60HZ


Cat. No.	AC3 Rating (A)	AC1 Rating (A)	Coil Voltage Range 140-220v 50/60Hz	Std. Pkg. Nos
MU-2PL 10A M2	8A	16A	M2 220V	72 Pcs.
MU-2PL 16A M2	10A	16A	M2 220V	72 Pcs.
MU-2PL 20A M2	16A	25A	M2 220V	72 Pcs.
MU-2PB 25A M2	25A	32A	M2 220V	48 Pcs.
MU-2PB 40A M2	40A	45A	M2 220V	48 Pcs.

NEW
MCH-2PH
DESIGN PATENT



MCH-2PH

2. MCH-2PH




NEW
MU-2PL
DESIGN PATENT



MU-2PL


2. MU-2PL, MU-2PB




MCH - 4Pole POWER CONTACTORS



2. MCH-3H



3. MCH-4H



1. CAT. NO. DESIGNATION

MCH ☐ ☐ ☐ ☐

COIL ORDER CODE -
M240V, UW300V, N1350V, N2400V, N415V 50HZ/60HZ

RATED OPERATIONAL CURRENT (A)
10A, 16A, 20A, 25A, 40A AC3 415V

MCH-3H FRAME SIZE 1
MCH-4H FRAME SIZE 1


NUMBER OF CONTACT
MCH-3H 3NO POWER POLE+1NO. AUX.CONT.
MCH-4H 4NO POWER POLE

PRODUCT CODE _____

MCH-3H, 4POLE CONTACTOR

THREE PHASE/SINGLE PHASE 3NO POWER POLE + 1NO.AUX.CONTACT

COIL VOLTAGE ORDER CODE - **M240V, UW300V, N1350V, N2400V, N415V 50HZ/60HZ**



MCH-3H

Cat. No.	AC3 Rating (A)	AC1 Rating (A)	Coil Voltage 50Hz	Auxillary Cont.	Std. Pkg. Nos
MCH-3H 10A N	8A	10A	N 415V	1NO	48 Pcs.
MCH-3H 16A N	10A	16A	N 415V	1NO	48 Pcs.
MCH-3H 20A N	16A	25A	N 415V	1NO	48 Pcs.
MCH-3H 25A N	25A	32A	N 415V	1NO	48 Pcs.
MCH-3H 40A N	40A	45A	N 415V	1NO	48 Pcs.

MCH-4H, 4POLE CONTACTOR

THREE PHASE/SINGLE PHASE 4NO POWER POLE CONTACTS

COIL VOLTAGE ORDER CODE - **M240, UW-300V, N1350V, N2400V, N-414V 50HZ/60HZ**



MCH-4H

Cat. No.	AC3 Rating (A)	AC1 Rating (A)	Coil Voltage 50/60Hz	Std. Pkg. Nos
MCH-4H 20A N	16A	25A	N 415V	48 Pcs.
MCH-4H 25A N	25A	32A	N 415V	48 Pcs.
MCH-4H 40A N	40A	45A	N 415V	48 Pcs.

CONTACTOR	DIMENSIONAL DRAWINGS	MOUNTING ARRANGEMENT
MCH - 2PB MCH - 2PH MU - 2PL MU - 2PB 2 POLE CONTACTOR		
MCH-3H, 4POLE CONTACTOR MCH-4H, 4POLE CONTACTOR		
ALL DIMENSIONS ARE IN MM.		WWW.MINTPOWERELECTRIC.COM

Synergy Enterprises

MANUFACTURERS OF:
 DEFINITE PURPOSE COTACTOR, POWER CONTACTOR
 SUBMERSIBLE CONTROLE PANELS

CB-303B, RING ROAD, NARAINA, NEW DELHI - 110028
 TEL.: +91-9811456067

 info@mintpowerelectric.com

 www.mintpowerelectric.com

CE

